

Finest ideas in Cooling for Retail & Super Market Solutions...



ISO 9001
ISO 14001



 THE MIDDLEBY CORPORATION

...brought to India by Middleby Celfrost

Hard Top Chest Freezers from 100 ltrs to 850 ltrs.

Presenting world's finest range of convertible chest freezers/coolers to suit every need, in one, two and three lid variants



Single Door



Double Door



Three Door

Half Freezer / Half Cooler



CFCC-335/350/400

Features:

- Unique dual temperature design with separate freezing and cooling chamber
- 2 separate lids for easy access to either chamber

Special Application Freezers/Coolers



CF-330 SS
(Also available in Double Door CF-435 DD SS)

Features:

- Copper evaporator coils
- SS 304 inside
- SS top



CF-600 SS

Features:

- Complete SS construction inside and outside

Technical Specification

Product/Model Specification	Hard Top Chest Freezers / Coolers											Half Freezer / Cooler		
	Single Door											Double Door		
	CF 100	CF 115	CF 132	CF 192	CF 210	CF 215	CF 232	CF 310	CF 315	CF 332	CF 335	CFCC 335	CFCC 350	CFCC 400
Capacity (litres)	105	110	100	177	210	230	220	320	330	330	330	300	350	400
Dimension (inch) WxDxH	22x22x33	21x22x34	22x23x31	34x22x31	36x22x33	37x22x34	32x28x33	39x29x33	44x25x34	43x28x33	44x27x33	49x24x36	51x26x34	52x28x37
Temperature Range	-18°C ~ -24°C / 2°C ~ 8°C											-18°C ~ -24°C & 2°C ~ 8°C		
Wheels/Foot	W*	W	F	F	W*	W	F	W	W	W	W	W	W	W
Lock	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Refrigerant	R600a	R134a	R600a	R600a	R600a	R134a	R600a	R290	R600a	R290	R134a	R134a	R600a	R290
Rated Load, Wattage	70	85	55	97	70	110	126	160	210	230	295	195	210	160
No. of Baskets	2	1	1	1	2	1	1	2	1	1	1	1	1	1
No. of Lids/Doors	1	1	1	1	1	1	1	1	1	1	1	2	2	2

Product/Model Specification	Hard Top Chest Freezers / Coolers											Special Application Freezers / Coolers	
	Double Door										Three Door	Single Door	Double Door
	CF 355 DD	CF 340 DD	CF 432 DD	CF 455 DD	CF 460 DD	CF 532 DD	CF 551 DD	CF 560 DD	CF 585 DD	CF 751 DD	CF 860	CF 330 SS	CF 435 DD SS
Capacity (litres)	330	330	440	423	425	550	500	525	520	700	820	290	390
Dimension (inch) WxDxH	43x28x33	45x29x34	55x28x33	59x24x33	49x29x34	66x28x33	60x30x34	61x29x34	63x30x33	72x30x34	95x29x35	41x30x33	50x30x33
Temperature Range	-18°C ~ -24°C / 2°C ~ 8°C												
Wheels/Foot	W	W	W	W	W	W	W	W	W	W	W*	W	W
Lock	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Refrigerant	R290	R134a	R290	R134a	R290	R290	R290	R290	R134a	R290	R290	R134a	R134a
Rated Load, Wattage	230	160	230	295	240	255	350	275	350	350	295	155	170
No. of Baskets	1	1	2	1	2	2	2	2	2	2	2	1	1
No. of Lids/Doors	2	2	2	2	2	2	2	2	2	2	3	1	2

Specifications, features and colours are subject to change without any notice, due to continuous product development.
CF 132/192/232/332SD/335/336DD/432DD/455DD/532DD/585 & CFCC 335 are with white painted sheet inside.
Accessories optional, product image are for representation, actual product might vary.

*This height without wheels.

Glass Top Freezers



IKG-111



IKG-311/411/511/611



IKG-711



IKG-210C



IKG-310C/410C



IKG-710C



Canopy optional & can be fixed on all flat/curved/Island glass top freezers to make it a scooping cabinets

- Ultra low energy consumption
- Longer holding
- Fastest cooling
- Special design end to end basket



IL-450/550

Technical Specification

Product/Model Specification	Flate Glass Chest Freezers						Curve Glass Chest Freezers				Island Showcase	
	IKG-111	IKG-311	IKG-411	IKG-511	IKG-611	IKG-711	IKG-210C	IKG-310C	IKG-410C	IKG-710C	IL-460	IL-550
Capacity (litres)	97	300	380	500	600	650	200	300	400	650	426	528
Dimension (inch)	Width	24	40	48	56	65	30	41	48	71	70	77
	Depth	21	27	27	27	27	26	27	27	27	29	36
	Height	33	32	32	32	34	33	32	32	34	34	39
Temperature Range	-18°C ~ -24°C										-18°C ~ -22°C	
Wheels	Yes	Yes	Yes	Yes	Yes	Yes	Yes*	Yes*	Yes*	Yes	Yes	Yes
Lock	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Refrigerant	R134a	R290	R290	R290	R290	R290	R290	R290	R290	R290	R134a	R134a
Rated Load, Wattage	160	275	275	295	295	400	240	275	275	400	275	310
No. of Baskets	1 [#] +1	2 [#] +2	2 [#] +2	2 [#] +2	2 [#] +2	9	1+1	2 [#] +2	2 [#] +3	9	4	6
No. of Lids/Doors	2	2	2	2	2	2	2	2	2	2	2	2

Specifications, features and colours are subject to change without any notice, due to continuous product development. Accessories optional, product image are for representation, actual product might vary.

*This height without wheels.

[#] QDI Baskets



Showcase Freezers



NFG-200*



NFG-450*



NFG-1000A*



NFG-1500*

Upright Freezer



BFS-150/250/350

Technical Specification

Upright Showcase Freezers	Product / Model Specification								
	Capacity (litres)	Dimension (WxDxH) inch	Temperature Range	Wheels	Lock	Refrigerant	Rated Load, Wattage	No. of Baskets/ Shelves	No. of Lids /Doors
NFG-200	211	24 x 28 x 39	-18°C ~ -22°C*	Yes	Yes	R404a	360	2	1
NFG-400	400	23 x 24 x 80	-18°C ~ -22°C*	Yes	Yes	R404a	400	4	1
NFG-450	450	27 x 28 x 81	-18°C ~ -22°C*	Yes	Yes	R404a	1000	4	1
NFG-1000A	1078	54 x 28 x 78	-18°C ~ -22°C*	Yes	Yes	R404a	1100	5+5	2
NFG-1500	1657	81 x 28 x 78	-18°C ~ -22°C*	Yes	Yes	R404a	1300	4+4+4	3
BFS 150	150	22 x 22 x 45	-18°C	Adjustable Feet	Yes	R134a	100	5	1
BFS 250	250	24 x 27 x 58	-18°C		Yes	R134a	120	8	1
BFS 350	350	24 x 27 x 70	-18°C		Yes	R134a	140	7	1

* Suitable to work at ambient temperature 28°C.

Accessories optional, product image are for representation, actual product might vary.

Complete range for retail solutions



IKG 60



MF 51G



FKG 20C/58C



NFG 58C



NFGC 49



CBF 67



FSDCR 108/FSDHR 108



FSDC 58

Technical Specification

Product/Model Specification	Freezers / Chillers									
	FSDHR 108	FSDCR 108	IKG 60	CBF 67	FSDC 58	FKG 20C	FKG 58C	NFGC 49	NFG 58C	MF 51G
Capacity (litres)	108	108	60	27	58	20	58	55	58	50
Dimension (inch) WxDxH	19 x 19 x 34	19 x 19 x 34	23 x 21 x 20	32 x 26 x 14	17 x 16 x 33	13 x 14 x 23	17 x 18 x 31	24 x 21 x 27	18 x 19 x 36	19 x 18 x 21
Temperature Range	30°C ~ 90°C	2°C ~ 10°C#	-18°C#	-18°C ~ -22°C / 2°C ~ 10°C#		2°C ~ 10°C#		-18°C ~ -22°C*		2°C ~ 10°C#
Wheels/Legs	Adjustable Feet		NA	Adjustable Feet	Legs	Adjustable Feet		Legs	Adjustable Feet	NA
Lock	Optional		NA	NA	Yes	Optional		Yes	Optional	NA
Refrigerant	NA	R600a	R134a	R600a	R600a	R600a	R600a	R290a	R134a	R600a
Rated Load, Wattage	1200	230	80	140	180	82	82	100	150	80
No. of Baskets/Shelves	4 (Rotating)	4 (Rotating)	1	8*1/6 GN PAN	2	1	2	2	3	1
No. of Lids/Doors	1	1	2	1	1	1	1	1	1	1
Digital Controller	Yes	Yes	**	Yes	Yes	-	-	Yes	Yes	-

* Suitable to work at ambient temperature 28°C.

**With digital temperature display.

Suitable to work at ambient temperature 32°C.

Accessories optional, product image are for representation, actual product might vary.



Showcase Coolers



FKG-120

FKG-235

FKG-320/400

FKG-321/421

FKG-371

FKG-330/430

FKG-325/425/525

FKG-610



FKG-600 DD

FKG-1000S

FKG-800C/1200C/1000C**
(FKG-1000C top mounted compressor & aluminum door frame)

NFKG-1000C

FKG-1400 TD/1425 TD/1500

Half Freezer
Half Chiller

Technical Specification

Product/Model Specification	Upright Showcase Coolers																						
	FKG 120	FKG 125	FKG 230	FKG 235	FKG 320	FKG 321	FKG 325/325SS	FKG 330	FKG 371	FKG 400	FKG 421	FKG 425/425SS	FKG 430	FKG 525	FKG 610	FKG 600 DD	FKG 800C	FKG 1000S	FKG* 1000C	FKG* 1200C	FKG* 1400/1425	FKG 1500	NFKG* 1000C
Capacity (litres)	120	115	200	210	300	300	320	300	381	400	400	420	400	520	600	630	800	1030	1027	1200	1400	1657	490+490
Dimension (inch) Width	22	19	20	22	21	21	21	22	23	24	24	27	26	27	28	36	42	47	48	48	72	81	48
Depth	23	21	23	24	25	24	23	24	23	27	23	23	24	27	29	27	25	28	28	28	28	28	28
Height	39	40	60	53	68	66	78	71	73	78	72	78	76	79	86	78	79	78	79	79	79	78	80
Temperature Range	2°C ~ 10°C																					2°C ~ 10°C & ≤-18°C*	
Wheels	Adjustable Screw	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Lock	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Refrigerant	R600a	R134a	R600a	R134a	R134a	R600a	R134a	R600a	R134a	R134a	R600a	R134a	R600a	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a
Rated Load, Wattage	170	150	190	180	220	230	276	200	350	240	260	296	250	296	390	350	330	550	420	400	680/780	800	800
No. of Shelves/Drawer	2	3	3	3	4	4	4	3	6	4	4	4	4	4	5	8	8	5+5	8	8	4+4+4	4+4+4	4+4
No. of Lids/Doors	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2	3	3	2

* at ambient of 32°C.

** FKG-1000C top mounted compressor & aluminum door frame.

Accessories optional, product image are for representation, actual product might vary.

Plug-in Multideck Chiller

(Close door option available in Chiller & Freezer)



HTS 1000 / 1200 / 1500




HTS 500



HTS 380

Serve Over Counter

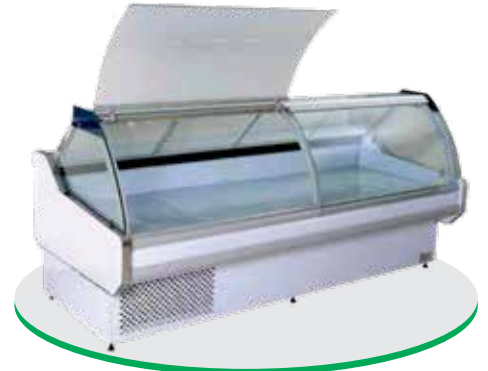

Plug-in & Remote

Island Freezers & Coolers



IL-450/550

Technical Specification

Product/Model Specification	Island Showcase		Multideck Chillers				
	IL-450	IL-550	HTS 380	HTS 500	HTS 1000	HTS 1200	HTS 1500
Capacity (litres)	426	528	380	220	770	950	1125
Dimension (inch) WxDxH	70 x 29 x 34	77 x 36 x 39	39 x 35 x 60	19 x 24 x 71	42 x 30 x 78	50 x 30 x 78	61 x 30 x 78
Temperature Range	-18°C ~ -22°C*		2°C ~ 10°C#				
Wheels	Yes	Yes	Yes	Adjustable Feet			
Lock	Yes	Yes	NA	NA	NA	NA	NA
Refrigerant	R134a	R134a	R290	R404a	R404a	R404a	R404a
Rated Load, Wattage	275	310	1300	830	1100	1100	1650
No. of Baskets/Shelves	4	6	3	3	4	4	4
No. of Lids/Doors	2	2	NA	NA	NA	NA	NA
Night Curtain	NA	NA	Yes	Yes	Yes	Yes	Yes

* Suitable to work at ambient temperature 28°C

Suitable to work at ambient temperature 32°C

Accessories optional, product image are for representation, actual product might vary.

Technical Specification for Remote Multideck Chiller

IDU Model	RHTS 2500	RHTS 3750
Dimension (WxDxH) in mm	2500 x 865 x 2000	3750 x 865 x 2000
Capacity (Ltr)/Display Area (m2)	1790/6.08	2650/8.65
Temperature Range	+2°C ~ +10°C (at 25°C, 60% RH)	
Legs	Adjustable Feet	
Night Curtain/Shelves Light	Yes	Yes
No of Shelves (Shelves Angle)	4 (0° / 10° / 20°)	
Digitl Controller	Yes	Yes
Defrost Drain	Yes	Yes
Automatic Evaporation of drain Water	No (Drain Provision to be provided at site)	
Condensing Unit (ODU)	CCO 127 HA	CCO 217 HA
Input Power IDU/ODU (W)	480/2500	700/3200
Electrical IDU/ODU	220 V / 50 Hz	220 V / 50 Hz & 400 V / 50 Hz
Refrigerant	R 404a	R 404a

Accessories optional, product image are for representation, actual product might vary.



Remote Multideck Chiller
(Close door option available in Chiller & Freezer)



Display-cum Storage Coldroom

Cool, soothing
drops of water
collected for you,
by Middleby
Celfrost!

24 month
Compressor
Warranty*



Technical Specifications

Model	S.Dlx. 20/20	S.Dlx. 20/40	S.Dlx. 40/40	S.Dlx. 40/80	S.Dlx. 60/120	S.Dlx. 150/150	S.Dlx. 200/400
Cooling Capacity	20	20	40	40	60	150	200
At 10°C temperature drop (Ltr/hr)	35	35	65	65	100	245	400
Glasses/hr at rated condition (Ltr/hr)	100	100	200	200	300	750	1000
Storage Capacity (Ltr)	20	40	40	80	120	150	400
No. of Faucets - cold water	1	1	1	2	2	2	4
Faucets Material	Brass (Cr Plated)						
Dimensions (mm)	370 x 370 x 1000	370 x 370 x 1185	370 x 370 x 1185	590 x 490 x 1200	700 x 540 x 1160	700 x 540 x 1320	1160 x 700 x 1400
Compressor / Make	Emerson 419 / LG-MA 53		Emerson 443, 444 / LG-MA 88		Emerson 461	Emerson 513	Emerson 513 / CR 22
Compressor / Refrigerant	R-134a	R-134a	R-134a	R-134a / R-22	R-22	R-22	R-22
Power (Watts)	390	390	450	450	775	1550	2000
Net Weight (Kgs.)	33	35	43	48	55	70	90
Legs	Nylon						
Water inlet hose pipe	Provided (Food Grade)						
Drain Pipe	Provided						
Over Flow Pipe	Provided						
Motor Make	Micro / Marathon (GE Motors)						

Note:

- All Models are suitable for operation on 230V / 1Ph / 50Hz AC Supply.
- Specification and features are subject to change without notice, due to continuous product development.

THE MIDDLEBY CORPORATION



Cold Room
Display-cum-Storage

MIDDLEBY CELFROST

Middleby Cel Frost Innovations (P) Ltd.

Corp. Office : Unit Nos. SF-713 — 716, 7th Floor, JMD Megapolis, Sohna Road, Sector 48, Gurgaon - 122 018, Haryana, India.

Tel. : +91 124 482 8500, Fax : +91 124 427 9663, E-mail : corp@middlebycelfrost.com, Web : www.middlebycelfrost.com

Toll Free Customer Service No.: 1800-102-1980 • service.india@middlebycelfrost.com

ONE PARTNER. ONE TEAM. MANY SOLUTIONS.



For sales related queries :-

Call: +91 124 4828500 • Email: sales@middlebycelfrost.com